




GYMlogix, the only logical option when it comes gym flooring.

Premium gym flooring available in rolls, tiles, or mats. Can be Interlocking or straight cut. Available in black, 10% color, and 20% color.




GYMlogix GYM FLOORING SPECIFICATIONS

PRODUCT STANDARDS & RESULTS

Item	Standard	Rating for Rolls an Tiles
Tensile Strength	ASTM D412	266 psi
Density	ASTM D3676	69.2lbs/cubic foot
Tear Resistance	ASTM D413	Average Elongation at break 1.55
Hardness	ASTM D2240	Shore A 65 +/- 5
Compression Set	ASTM D395	-4.90%
VOC Emissions	ASTM D5116	0.5 mg/m2 or less
Flammability	ASTM D2859	PASS
Resistance to Chemicals	F-925-02	Resistant to most acids and chlorine
Coefficient to Friction	ASTM D1894/5	>0.8

GYM FLOORING DIMENSIONS- ROLLS

Width:	Standard - 4'	
Thickness:	Standard - 3mm-12mm	
Length:	Standard - 25' & 50'	
Weight:	Thickness	Per sq ft
	3mm (1/8")	10.5 oz
	4mm (5/32")	13.5 oz
	6mm (1/4")	1.25 lbs
	8mm (5/16)	1.65 lbs
	9mm (3/8)	2 lbs
	12mm (1/2)	2.5lbs

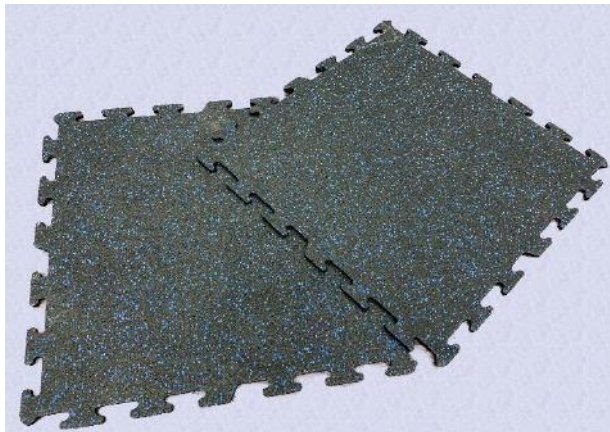

*Rolls available in 3mm,4mm,6mm,8mm,9mm, & 12mm. Tiles are available in 6mm, 8mm, 9mm, & 12mm.

*Custom widths are also available.